

## 4 Channel Video Server

VS-04A Series




MJPEG , H.264



- MJPEG and H.264 Codec Compression
- Built-in VGA connector
- Audio/Line In for 2 Way Audio Support
- 2 DI/DO for External Alarm and Sensor Devices
- Image enhancement



Photo Indication & Dimension Diagram

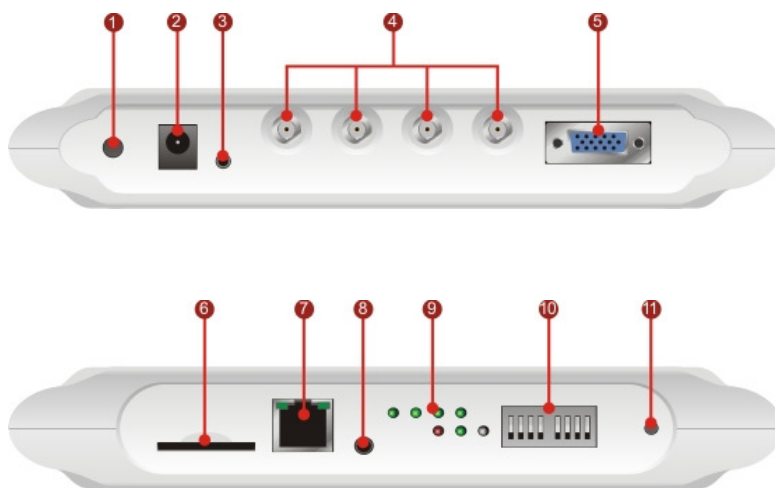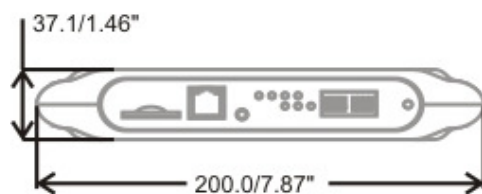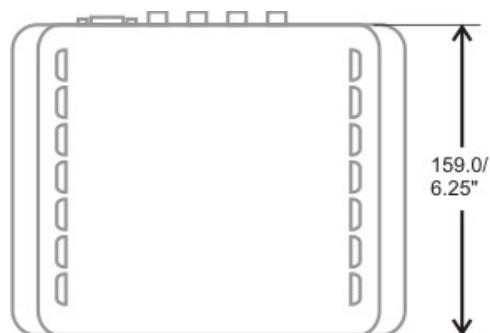

- |  |  |
|--|--|
| <ul style="list-style-type: none"> <li>1 Power Switch</li> <li>2 Power Connector (DC12V)</li> <li>3 Audio In</li> <li>4 BNC Video Input 1,2,3,4</li> <li>5 VGA Output</li> </ul> | <ul style="list-style-type: none"> <li>6 SD Card Slot (*)</li> <li>7 Network Connector</li> <li>8 Audio Out</li> <li>9 LED Indicators</li> <li>10 Extension I/O Terminal Block</li> <li>11 Reset Button</li> </ul> |
|--|--|

## VS-04A Series

Camera		General	
<b>Hardware System</b>	CPU: 533 MHz Flash: 16M RAM: 256M DDR	<b>Communication</b>	Ethernet : one 10/100Mbps RJ-45 Supported Protocols : TCP/IP, UDP, ICMP, DHCP, NTP, DNS, DDNS, SMTP, HTTP, PPPoE, UPnP, RTP, RTSP, RTCP
Video		<b>PTZ Protocol</b>	Pelco D and P Protocol
<b>Video Image Compression</b>	Compression : H.264 / MJPEG via signal stream Analog Composite Video BNC Input, NTSC/PAL	<b>Power Input</b>	DC12V/ 1A(Power Supply)
<b>Image Resolution</b>	NTSC: 30fps@720x480(D1) PAL: 30fps@720x567(D1)	<b>Max. Power Consumption Environment</b>	12 watts Operating Temperature 0°C ~ 40°C (32°F ~ 104°F), Operating Humidity : 10% ~ 80%
	H.264: 4CH NTSC/PAL: 15fps MJPEG: 4CH NTSC/PAL: 15fps	<b>Dimension</b>	200 (L) X160 (W) X 37 (H) mm
Audio		<b>Weight</b>	415g
<b>Audio Streaming</b>	2-way Audio Support	<b>Certification</b>	FCC, CE
<b>Audio Input/ Output</b>	external microphone or Line input/ Line output	<b>Warranty</b>	Limited 2-year warranty

